



**Zeus-K** is a device that allows you to store and control the energy consumed by an electric utility by directly reading the data from the electric meter. Installs easily with just a few simple steps and does not require external power because it operates on two mini stylus with typical autonomy 2 years. The light signals emitted by the electric meter are stored permanently in an internal memory and can at any time be downloaded through the use of a common USB stick. The software Zeuslog Viewer, freely downloadable from the site [www.zeuslog.com](http://www.zeuslog.com), makes data interpretation and display highlighting the consumption in various time slots both reactive and active power.



**WARNING: Read the instruction manual before attempting to operate the device**

### Package contents

The package contains the following items:

1. Zeus-K device;
2. Velcro for positioning;
3. Quick Guide.



**ATTENTION: The 2 AAA batteries required to operating are not provided.**

**CAUTION: Use only alkaline batteries, do not use rechargeable batteries.**

On the [www.zeuslog.com](http://www.zeuslog.com) website are available:

- User manual;
- Visualization software with examples.




**CAUTION: Always use USB sticks without relevant data. The download operation might damage the files in Flash.**

### Installation

The package contains an velcro adhesive element usually already paired to its counterpart in velcro on device Zeus K. This part of velcro has to be fastened on the left side of the display as shown below.

The velcro adhesive positioning should be carried out as follows:

1. Join (if it isn't already) the adhesive velcro to its counterpart already positioned on the Zeus K device. This is facilitated by the slight asymmetry of the shaping.
2. After you joined the two pieces of velcro you will be some attempts to positioning the device before arriving at the definitive one. That is, using the particular shape to "fingernail" you slide your device resting on the electric counter display from right to left. You have to scroll Zeus-K device up to stick the "fingernail" to the shape of the display of electric counter.
3. After positioning, you proceed to remove the sticker from the velcro repeating the positioning of the device as done in step two, but this time by joining the velcro adhesive to the electric counter.
4. Once the device is installed you can remove it easily by pulling from the front.

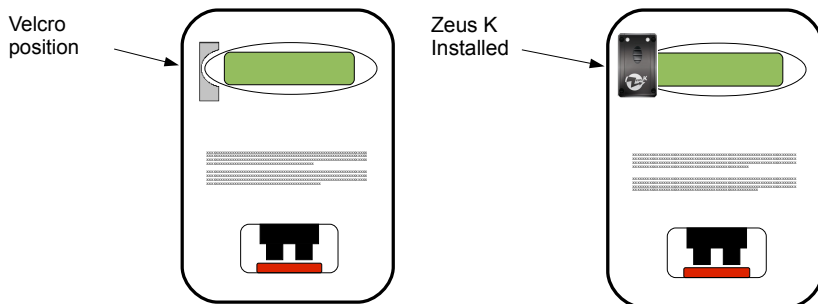

*Electric meter with Zeus K installed*

**Teypra srl**  
Via L. Einaudi, 99  
45100 Rovigo (RO)  
VAT N. IT01456780293  
Email: [info@teypra.com](mailto:info@teypra.com)  
web site: [www.teypra.com](http://www.teypra.com)



Do not throw the device in the household waste.  
Use the collection systems available in your country